

Seat Post Di2 battery plugs Installation Instruction

Published – Oct, 2014. ZSP017.v0 © Full Speed Ahead



Introduction

Congratulations on your Full Speed Ahead product. Please read these instructions and follow them for correct use. Failure to follow the warnings and instructions could result in damage to product not covered under warranty, damage to bicycle; or cause an accident resulting in injury or death. Since specific tools and experience are necessary for proper installation, it is recommended that the product be installed by a qualified bicycle technician. FSA & Vision assumes no responsibility for damages or injury related to improperly installed components.

Warranty

Full Speed Ahead (FSA) warrants all FSA, Gravity, Vision, Metropolis and RPM products to be free from defects in materials or workmanship for a period of two years after original purchase unless otherwise stated in the full warranty policy. The warranty is non-transferable and valid to the original purchaser of the product only. Any attempt to modify the product in any way such as drilling, grinding, and painting will void the warranty. For more information on warranty policy and instructions for completing a warranty claim, check out the Full Warranty Policy found at our website: <http://www.fullspeedahead.com/techdoc>

Specification

Item Number / Model Name	E0536 for Post OD Ø 31.6 mm
Item Number / Model Name	E0535 for Post OD Ø 27.2 mm / K-F-L
Item Number / Model Name	E0537 for Post OD Ø 27.2 mm / SL-K



Battery Plugs Installation

The battery plug is applicable Shimano battery (SM-BTR2).

Tools for Battery Plugs Installation

Cotton glove


1. Connect Shimano Battery adapter.



2. Insert the Shimano battery (SM-BTR2) into battery plug.



3. Wearing gloves, then fit battery plug by rotation into the end of the seat tube.

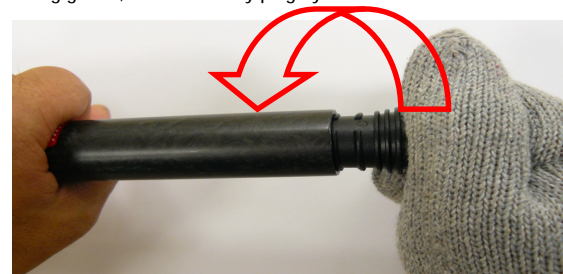

4. Turn the battery plug all the way to seatpost.



⚠ WARNING Do not use wooden or metal hammer to knock the battery plug into the seatpost to avoid damage the battery. Do not apply any grease on the battery plug nor on the inside of seatpost.



Contact

If you have questions, please visit our web site technical section: <http://www.fullspeedahead.com/contact> or contact:

Full Speed Ahead, USA
12212 Cyrus Way Mukilteo, WA 98275-5702
Tel: 1_425_488_8653 Fax: 1_425_489_1082

Full Speed Ahead, Europe
Via Del Lavoro, 56 20874 Busnago, Milan, Italy
Tel: +39_039_688_5265 Fax: +39_039_682_3336

TH INDUSTRIES / FSA Asia
NO.6, Wu-gong 8th Rd., Wufeng Dist., Taichung City 41353, Taiwan (R.O.C.)
Tel: +886_4_2331_9134 Fax: +886_4_2331_9314

Notes: Specifications of product may be changed or improved for performance. Please refer to website periodically for technical updates and revised instructions. Printed in Taiwan.

