

BB30 Shell ID Go/No Go and Bearing Alignment Gauge Installation Instructions

Published – Mar, 2011. ZSP004.v1 © Full Speed Ahead



Introduction

Congratulations on your Full Speed Ahead product. Please read these instructions and follow them for correct use. Failure to follow the warnings and instructions could result in damage to product not covered under warranty, damage to bicycle; or cause an accident resulting in injury or death. Since specific tools and experience are necessary for proper installation, it is recommended that the product be installed by a qualified bicycle technician. FSA & Vision assumes no responsibility for damages or injury related to improperly installed components.

Warranty

Full Speed Ahead (FSA) warrants all FSA, Gravity, Vision, Metropolis and RPM products to be free from defects in materials or workmanship for a period of two years after original purchase unless otherwise stated in the full warranty policy. The warranty is non-transferable and valid to the original purchaser of the product only. Any attempt to modify the product in any way such as drilling, grinding, and painting will void the warranty. For more information on warranty policy and instructions for completing a warranty claim, check out the Full Warranty Policy found at our website: <http://www.fullspeedahead.com/techdoc>

Specification

Item Number / Model Name E0171 / BB30 Shell ID Go/No Go Gauge

Item Number / Model Name EE036 / BB30 Bearing Alignment Gauge



BB30 Shell ID Go/No Go Gauge

The GO/NG gauge is used to quickly check the diameter of BB30 shell.

BB30 shell ID : $\Phi 41.96^{+0.025}_0$

The Go/No Go Gauge is two-sided.

- A. The GO side has a outer diameter (OD) of $\Phi 41.955\text{mm}$.
- B. The No Go (NG) with an outer diameter (OD) of $\Phi 41.990\text{mm}$.



Inspection

1. Insert GO end of gauge into the right and left BB shell openings. If gauge does not fully insert into either end of BB shell, this indicates the BB shell has an undersized ID and cannot be used until reamed to proper diameter. If the GO end of gauge fits within BB shell, proceed to check with the NG end of the gauge.



2. Insert NG end of gauge into the right and left BB shell openings. If gauge fully inserts into either end of BB shell, this indicates the BB shell has an oversized ID and cannot be used. Installing bearings into BB shells with oversized ID will result in poor bearing performance, creaking, and potential bearing failure.

Note:

- ① Ensure shell inner diameter Go/No Go gauge inspection surfaces are clean and free of debris.
- ② The GO/NG gauge is used to quickly check the diameter of BB30 shell. Not to ensure the BB30 shell is true round. If a crankset and bottom bracket are installed in a BB30 shell that is not true round (oval shape), noises such as creaking, and/or bearing damage may develop after short use.




BB Bearing Alignment Gauge

The gauge is used to check BB shell is eccentric.



Inspection

1. Insert shaft with handle into right or left BB shell opening. Slide the opposing side of the gauge onto the shaft moving each inspection surface into the right and left openings of the BB shell.

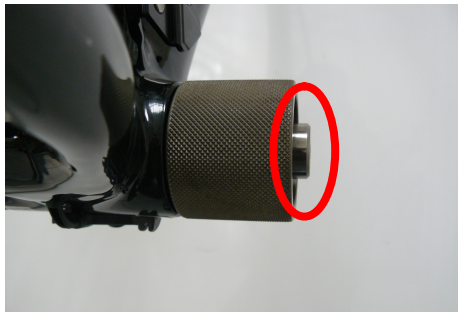

Note:

The tolerance of BB shell eccentric is $\pm 0.02\text{mm}$.



Contact

If you have questions, please visit our web site technical section: <http://www.fullspeedahead.com/contact> or contact:

Full Speed Ahead, USA
12212 Cyrus Way Mukilteo, WA 98275-5702
Tel: 1_425_488_8653 Fax: 1_425_489_1082

Full Speed Ahead, Europe
Via Del Lavoro, 56 20874 Busnago, Milan, Italy
Tel: +39_039_688_5265 Fax: +39_039_682_3336

TH INDUSTRIES / FSA Asia
NO.6, Wu-gong 8th Rd., Wufeng Dist., Taichung City 41353, Taiwan (R.O.C.)
Tel: +886_4_2331_9134 Fax: +886_4_2331_9314

Notes: Specifications of product may be changed or improved for performance. Please refer to website periodically for technical updates and revised instructions. Printed in Taiwan.

